


船用搭焊钢法兰(四进位) GB 2506-89

Marine lap welded steel flanges(quaternary)

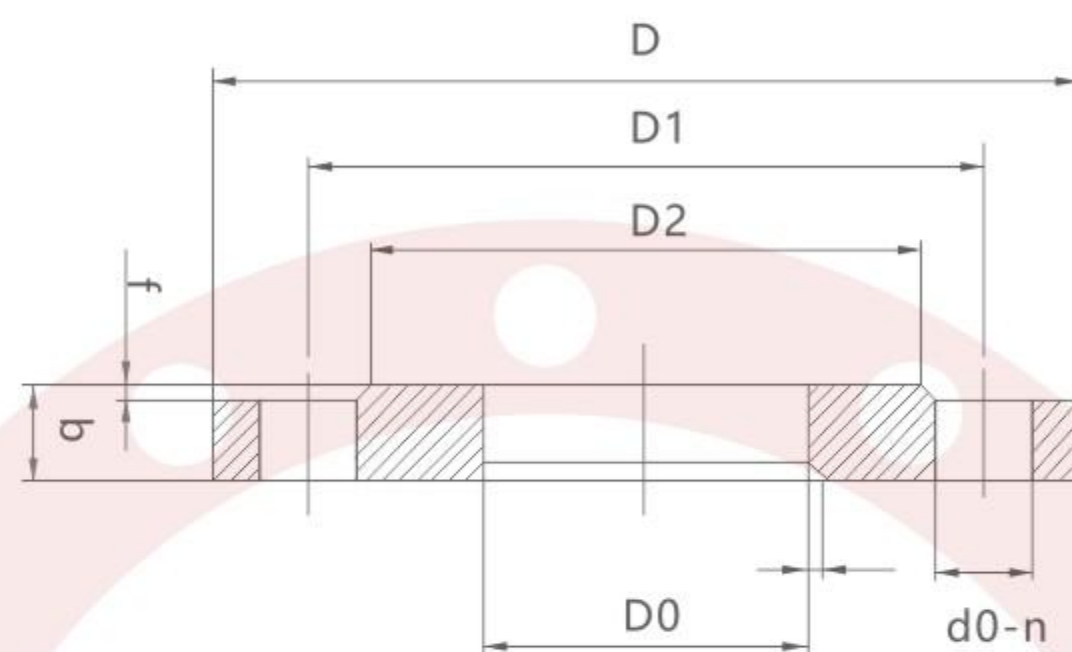

公称 压力 PN Mpa	公称 通径 DN	管子外径DW		法兰			密封面			焊缝高 度与倒 角边宽 k	端距 h	螺栓螺纹及通孔			重量 kg				
		第一 系列	第二 系列	D	D1	D0	b	D2	f			Th.	d0	n(个)					
0.25、 0.6	10	17.2	17	75	50	18	12	35	2	3	4	M10	11	4	0.31				
	15	21.3	22	80	55	23		40							0.35				
	20	26.9	27	90	65	28		14							50	0.53			
	25	33.7	34	100	75	35	60								0.64				
	32	42.4	42	120	90	43	16	70	3	4	5	M12	14	8	1.08				
	40	48.3	48	130	100	49		80							1.19				
	50	60.3	60	140	110	61		90							1.31				
	65	76.1	76	160	130	77.5	18	110							4	5	M16	18	8
	80	88.9	89	190	150	90.5		128	2.01										
	100	114.3	114	210	170	116		148	3.71										
	125	139.7	140	240	200	142	20	178	5	6	M20	22	12	3.90					
	150	168.3	168	265	225	170		202						4.32					
	175	193.7	194	295	255	196		232						5.82					
	200	219.1	219	320	280	221.5	22	258						6	7	M24	26	20	6.31
	225	-	245	345	305	248		282	6.85										
	250	273		375	335	276.5		24	312	8	9	M27	30						24
	300	323.9	325	440	395	328.5	365		10.60										
	350	355.6	377	490	445	360 381	26		415					15.47					
	400	406.4	426	540	495	410 430	28	465	4					10	11	M27	30	28	
	450	457	480	595	550	462 485	30	520		23.03									
	500	508	530	645	660	513 535	32	570		24.05									
	0.25	600	610	630	755	705	615 635	32	670	5	8	9	M27	30	20	32.07			
700		711	-	860	810	由用户 提供	775		24							-			
800		813		975	920		34										880		
900		914		1075	1020		36	980											
1000		1016	-	1175	1120	由用户 提供	1080	10	11	12	44	1280	36	40	-				
1200		1220		1375	1320		48									1480			
1400		1420		1575	1520		55									1690			
1600		1620	-	1790	1730	由用户 提供	1890	11	12	60	1890	44	48	-					
1800		1820		1990	1930		66								2090				
2000		2020		-	2190		2130												

公称 压力 PN Mpa	公称 通径 DN	管子外径DW		法兰				密封面		焊缝高 度与倒 角边宽 k	端距 h	螺栓螺纹及通孔			重量 kg					
		第一 系列	第二 系列	D	D1	D0	b	D2	f			Th.	d0	n(个)						
0.6	600	610	630	755	705	615	635	38	670	5	8	9	M24	26	20	38.71				
	700	711	-	860	810	由用户 提供	42	775	24						-					
	800	813		46	880		M27	30								32	-			
	900	914	-	1075	1020						50	980	11	M30				33	40	-
	1000	1016		1175	1120				56		1080	12			M33					
	1200	1220	1405	1340	64		1295	11	12		M36		39	44		-				
	1400	1420	-	1630	1560		76					1510			12		M36	39	44	-
	1600	1620		1830	1760		84					1710								
	1800	1820	2045	1970	94		1920	12	M36		39	44	-							
1.0、 1.6	10	17.2	17	90	60		18			14				42	2	3	4	M12	14	4
	15	21.3	22	95	65	23	47	0.59												
	20	26.9	27	105	75	28	58	0.84												
	25	33.7	34	115	85	35	68	1.09												
	32	42.4	42	140	100	43	78	1.81												
	40	48.3	48	150	110	49	88	2.05												
	50	60.3	60	165	125	61	18	102	2.42											
	65	76.1	76	185	145	77.5		122	2.96											
	80	88.9	89	200	160	90.5		133	3.21											
	100	114.3	114	220	180	116	20	158	4.01											
	125	139.7	140	250	210	142		184	4.90											
	150	168.3	168	285	240	170		212	6.50											
	1.0	175	193.7	194	315	270	196	24	242	4	6	7	M20	22		8	7.72			
		200	219.1	219	340	295	221.5		268								8.53			
		225	-	245	370	325	248		295								9.73			
250		273	273	395	350	276.5	26	320	12		10.94									
300		323.9	325	445	400	328.5		370			12.31									
350		355.6	377	505	460	360		381			28	430	16	19.02						
400		406.4	426	565	515	410	430	32	482		25.95									
450		457	480	615	565	462	485	35	532		20	31.01								
500		508	530	670	620	513	535	38	585			38.27								
600		610	630	780	725	615	635	48	685			59.36								
1.6		200	219.1	219	340	295	221.5	26	268		3	6	7	M20	22	12	9.06			
	225	-	245	370	325	248	27	295	10.76											
	250	273	273	405	355	276.5	29	320	13.21											
	300	323.9	325	460	410	328.5	32	370	4	7	8	M24	26	16	17.40					
	350	355.6	377	520	470	360	381	36							430	27.91				
	400	406.4	426	580	525	410	430	40							482	35.92				
	450	457	480	640	585	462	485	46	532	5	9	10	M27	30	20	48.33				
	500	508	530	715	650	513	535	52	585							69.15				
	600	610	630	840	770	615	635	60	685							105.35				